


Dunnage Airbags



Dunnage Airbags Stopak PP Woven

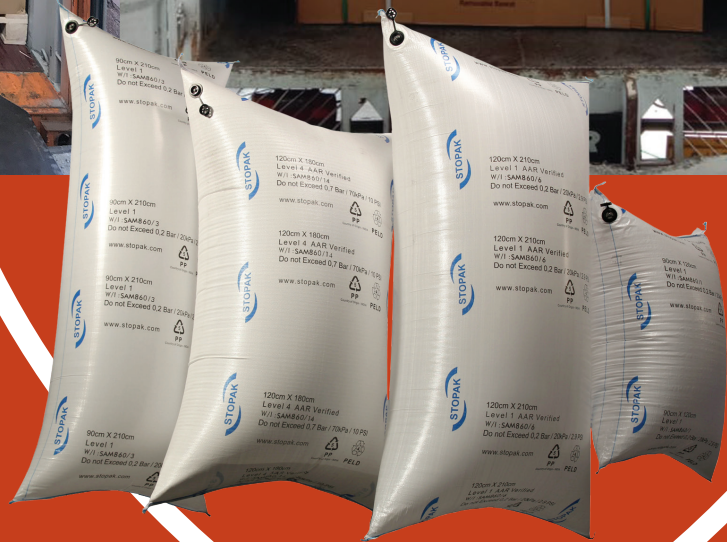

Innovative Design

Cutting edge technology inflation tools and valves to ensure quick inflation to desired pressure

Unparalleled Performance

World class facility with high quality system ensures reliable and consistent performance

Damage Reduction

Provide reliable damage prevention solutions to protect your cargo movement on sea and on land

Highly Sustainable

It is made up of 100% recyclable materials

Dunnage Airbags

Stopak PP Woven



Stopak Dunnage Airbags are made from quality material using latest technology. These bags are specially engineered to be compliant with the Association of American Railroads standards thereby ensuring customer product safety until ultimate destination.

Features and benefits

Reliable Performance

Stopak Dunnage Airbags are made up of high-grade materials with exact specifications to provide reliable cargo protection for any type of transport ensuring safe arrival of the product to end customers.

Application Flexibility

It comes in different sizes or variants as per the application and customer's need. It also provides 100% moisture & tear resistance and is also compatible with Refrigerated containers. Customized airbags are available to suit customer-specific load transit conditions.

Cost Effective Solution

Stopak Dunnage Airbags offer a cost effective transport protection solution costing 20% lesser than paper airbags. It also has a lower shipping cost owing to the fact that it ships 40% more quantity in the same size box.



Variants:

Hanger Bags



Square Bags



Double Sided Tape Bags



Customized Length Bags



Valve on Edge Bags



Mid-placed Valve



Stopak PP Woven Technical Specifications

Size	Maximum Void (Recommended)
Width x Length (mm)	(mm)
600mm x 900mm	200
600mm x 1200mm	200
900mm x 1200mm	300
900mm x 1500mm	300
900mm x 1800mm	300
900mm x 2100mm	300
1200mm x 1800mm	400
1200mm x 2100mm	400
1200mm x 2250mm	400
1500mm x 2400mm	500

1. Fill Pressure: Stopak Level 1 – 2.9 psi, Stopak OTR – 2.9 psi & Stopak OTR 2 – 1.8 psi
2. Burst Pressure: Stopak Level 1 – 8 psi, Stopak OTR – 6 psi & Stopak OTR 2 – 4.3 psi
3. Valve Type: Stopak Level 1 & Stopak OTR – Jumbo Dual Clip-On Valve (JDCV), Stopak OTR 2 – Lock Down Valve (LDV)
4. Customized bag sizes can be made available based on the volumes



Verified

Inflation Technology

Pneumatic Inflators



Electric Inflators



Clip On Valve Technology

