

2SM

Case Sealing solutions for Inner cartons



Features and Benefits

- Ideal for case sealing of smaller/Inner cartons
- Twin mast column for greater stability during operation
- Spring loaded top drive set for smooth flow and no damage to delicate cartons
- Uniform & controlled pressure during taping
- Consistent tape overlap
- Telescopic legs for height adjustment
- Quick & simple adjustment for varying carton sizes

2SM

Case Sealing solutions for Inner cartons

Technical Data

Machine Specification

2SM

Taping Head	:	1.5"/ 2"
Length	:	830 mm
Width	:	670 mm
Height	:	1320 mm
Weight	:	110 Kg
Color	:	RAL 6000 & RAL 1021 Yellow (Moving parts)
Drive Motor	:	0.25 HP, 2 No.
Machine Through put	:	Up to 25 cartons/ Min depending on Carton length

Utility Requirements


Air Requirement	:	NA
Air Consumption	:	NA
Power Supply	:	230 VAC, Single Phase, 50 Hz
Power Consumption	:	0.36KW
Tap Roll Length	:	65 M/ 650 M/ 1000 M

Case Dimensions

Length	:	80 mm - Unlimited
Width	:	90 mm -300 mm
Height	:	80 mm -300 mm
Weight	:	1- 20 Kg
Carton Ply	:	Min 3 Ply



E: info@signodeindia.com | W: www.signodegroup.com

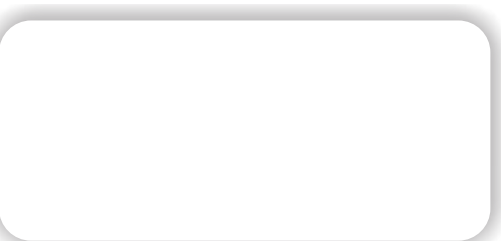

Toll Free Number for Services 1800 419 1466