


# Mobile Pallet Strapper



## Mobile Pallet Strapper Side-Seal Strapping Machine

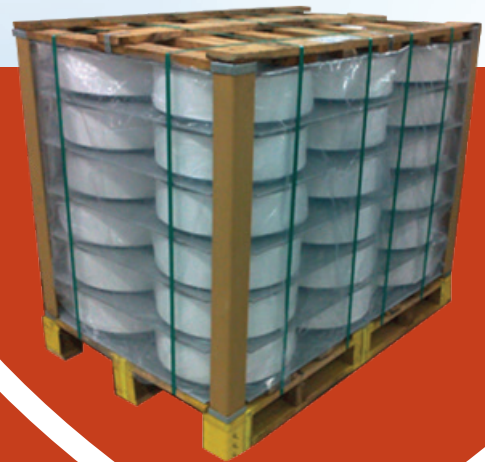

### Portability

Castor wheels provide mobility for packages on pallet

### Streamlined Operations

User-friendly and intuitive design simplifies operation

### Low Maintenance

Robust design with minimum maintenance

### Increased Productivity

Reduces manpower requirement for strapping

# Mobile Pallet Strapper

## Side-Seal Strapping Machine



Mobile Pallet Strapper is a semi-auto side-sealing machine for pallet strapping. Available in two variants, it is an efficient and reliable strapping option.

### Features and benefits

#### ■ Maximizes Productivity

Built with an auxiliary strap feed device to deliver a fast strapping cycle and reduce manpower, the Mobile Pallet Strapper enhances productivity.

#### ■ Portability

Designed to move on caster wheels, the Mobile Pallet Strapper can be used anywhere for strapping and occupies less working space.

#### ■ Application Versatility

It can be used with both PP and PET strap by simply switching between the two which makes it suitable for a wide range of applications.

### Fixed Track Variant



### Mobile Track Variant



### Mobile Pallet Strapper Technical Specifications

Parameter	MBV-F	MBV-M
	(Fixed Track)	(Mobile Track)
Strap Type	Polypropylene (PP) / Polyester (PET)	Polypropylene (PP) / Polyester (PET)
Strap Width	9 mm – 15 mm	9 mm – 15 mm
Tension Range	15 – 70 kg (adjustable)	15- 70 kg (adjustable)
Motor	AC	AC
Sealing Method	Heating element	Heating Element
Strapping Cycle Time (approx.)	2.5 seconds	2.5 seconds
Dispenser Core	200 mm – PP 406 mm – PET (optional)	200 mm – PP 406 mm – PET (optional)
Power Supply	230V, 50Hz, 1PH 415V, 50Hz, 3PH	230V, 50Hz, 1PH 415V, 50Hz, 3PH
Power Consumption	Up to 0.95 kw	Up to 0.95 kw
Control Voltage	24 V	24 V
Machine Dimensions (L x W x H)	2025m x 765mm x 1005 mm	1005mm x 765mm x 1120 mm
Machine Weight	200 kg	200 kg